



**TECHNICAL DATA / FEATURES**

- dimensions:  $\phi 117 \times 74$
- light functions: driving
- function markings: HR
- maximum power: 29W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- reference mark: 12.5
- source of light: 6 x LED
- IP rating: IP67, IP69K, IP66
- work temperature:  $-40^{\circ}\text{C} - +80^{\circ}\text{C}$
- housing's material: aluminium/plastic
- lens' material: glass
- built-in connectors: AMP Faston 250, Deutsch DT, AMP SuperSeal 1.5
- other: protection:
  - against overheating
  - against reverse polarisation
- bracket made of Inox steel





**ADDITIONAL INFORMATION**

Stylish and robust lamps dedicated for cars.  
 The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.  
 Correct polarity required.  
 Mounting: as a freestanding on body panels. They can be installed in any position (standing, hanging, on side).  
 It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:  
 AMP Faston 250 plug 2-pin - cat. No. A.07138  
 AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137  
 deutsch plug DT06-2S 2-pin - cat. No. A.07135

**DIMENSIONS**

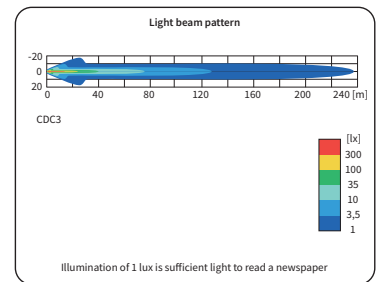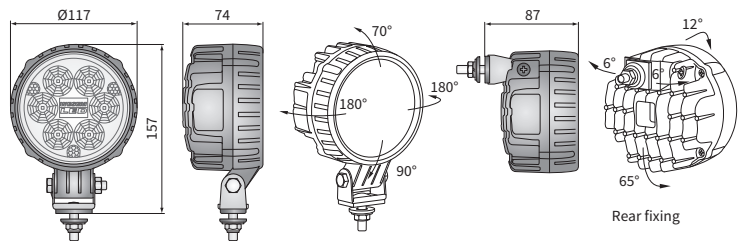

Cat. number	Homologation code	Light functions		Reference mark	IP rating	IP66	IP67	IP69K	Accessories		Mounting method				Connectors				
		driving	12,5						LED module 12V-24V	cable 0,5 m	installed vertically up	suspended	side	rear	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	Cap / Pin	
<b>CDC3.51800</b>	085	✓	✓	12,5				✓	✓	✓	✓	✓	✓						
<b>CDC3.51806</b>	085	✓	✓	12,5	✓			✓	✓	✓	✓	✓	✓	✓					2
<b>CDC3.51807</b>	085	✓	✓	12,5				✓	✓	✓	✓	✓	✓				✓		2
<b>CDC3.51808</b>	085	✓	✓	12,5				✓	✓	✓	✓	✓	✓				✓		2
CDC3.51820	085	✓	✓	12,5				✓	✓	✓	✓	✓	✓						
CDC3.51821	085	✓	✓	12,5				✓	✓	✓	✓	✓	✓				✓		2